


# Lances with **ST-54.3**

## Variopress

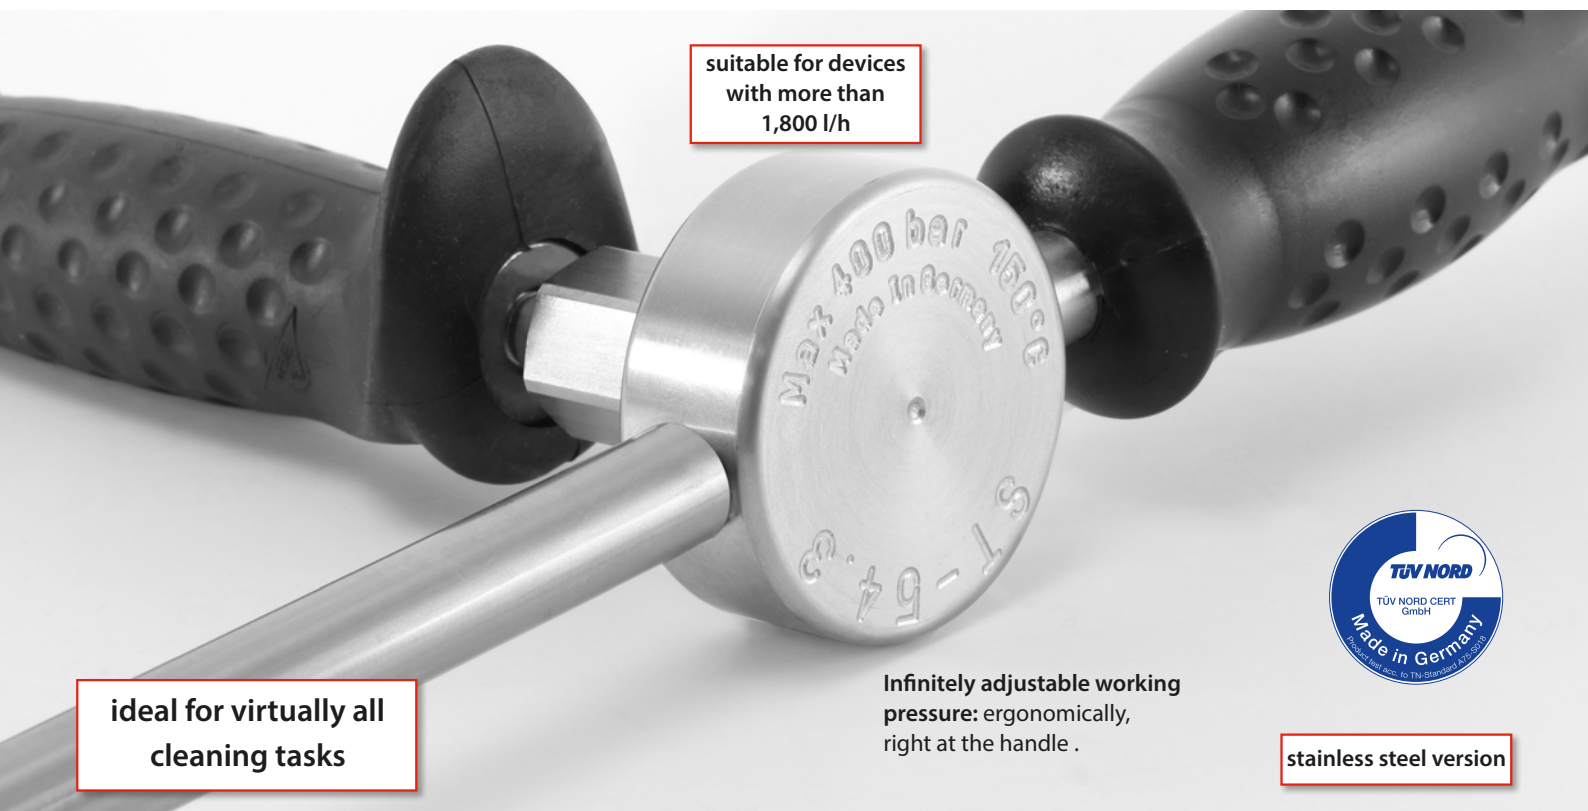

suitable for devices  
with more than  
1,800 l/h

ideal for virtually all  
cleaning tasks

Infinitely adjustable working  
pressure: ergonomically,  
right at the handle .




stainless steel version

### Professional stainless steel pressure regulation lance

- for accurate regulation of water quantity and pressure directly on the side handle
- ideal for virtually all cleaning tasks
- easy handling, ergonomic side handle
- stainless steel version
- with molded lance Cool & Compact ST-29
- max. pressure: 400 bar, 5,800 psi
- max. temperature: 150 °C
- max. flow: 45 litres

**Ergonomic:**  
handle-safe and robust  
design for the  
durable, professional use.

#### The connection options:



**Safe and easy  
handling:** simply turn  
for perfect regulation.



**In good shape:** Stainless steel valve with engraved technical data



Pressure regulation valve  
1/4" F

P/N :  
710 054 454

#### Technical data


Max. pressure / temperature	400 bar, 5,800 psi / 150 °C
Max. flow	45 l
Nozzle protector	ST-10 / tip nozzle holder / <b>hydroblade®</b> without nozzles
Length	1,200 mm
Outlet	nozzle holder EG / 1/4" F NPT / <b>hydroblade®</b> nozzle protector
Material valve and lance	stainless steel

Insulation ST-29  
Cool & Compact



# Lances with ST-54.3 Variopress

Lance with valve ST-54.3 aside suitable for devices with more than 1,800 l/h

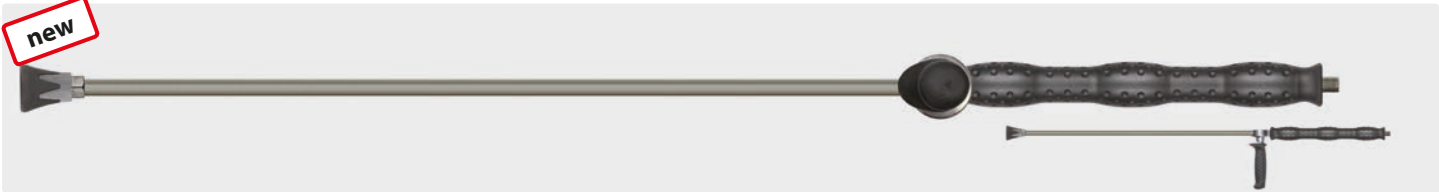


P/N :	Outlet	Insulation	Length	Material
517 054 700	1/4" IG NPT	300 mm	800 mm	stainless steel

1/4" M. Lance with moulded handle ST-29 Cool & Compact, valve ST-54.3 aside and nozzle protector ST-10 without nozzle. Max. 400 bar / 150 °C




P/N :	Outlet	Insulation	Length	Material
517 054 730	1/4" F NPT	300 mm	800 mm	stainless steel

Plug KW. Lance with moulded handle ST-29 Cool & Compact, valve ST-54.3 aside and nozzle protector ST-10 without nozzle. Max. 400 bar / 150 °C

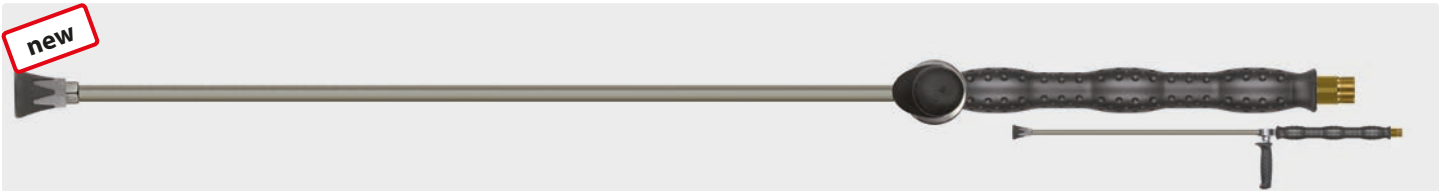


P/N :	Outlet	Insulation	Length	Material
517 054 710	1/4" F NPT	300 mm	800 mm	stainless steel

M22 M. Lance with moulded handle ST-29 Cool & Compact, valve ST-54.3 aside and nozzle protector ST-10 without nozzle. Max. 400 bar / 150 °C

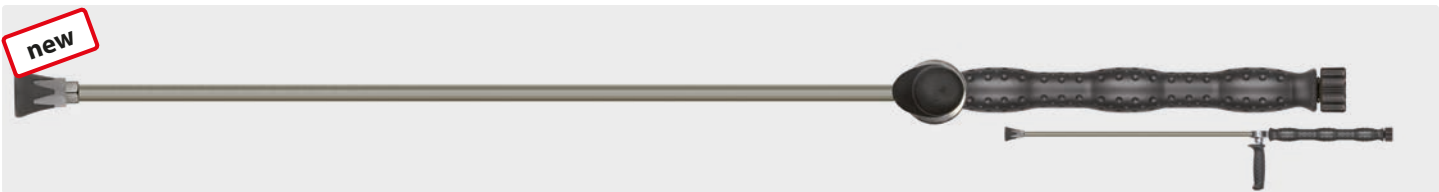

P/N :	Outlet	Insulation	Length	Material
517 054 720	1/4" F NPT	300 mm	800 mm	stainless steel

M22 F. Lance with moulded handle ST-29 Cool & Compact, valve ST-54.3 aside and nozzle protector ST-10 without nozzle. Max. 400 bar / 150 °C

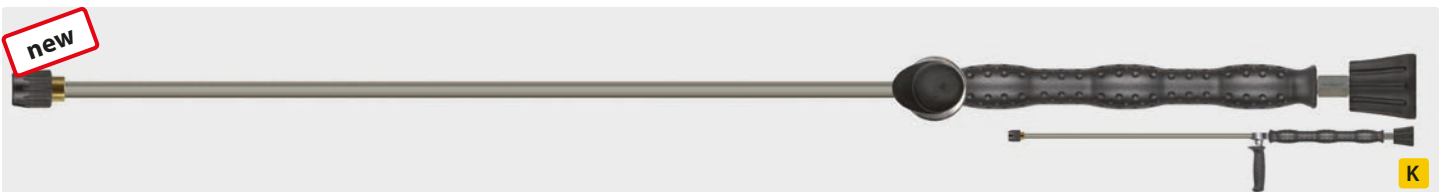

P/N :	Outlet	Insulation	Length	Material
517 054 740	tip nozzle holder	300 mm	800 mm	stainless steel

M22 F swivel. Lance with moulded handle ST-29 Cool & Compact, valve ST-54.3 aside and nozzle protector without tip. Max. 400 bar / 150 °C



P/N :	hydroblade® outlet	Insulation	Length	Material
517 054 750	nozzle protector	300 mm	800 mm	stainless steel

Plug ST-247. Lance with moulded handle ST-29 Cool & Compact, valve ST-54.3 aside and and hydroblade® nozzle protector without hydroblade® nozzles. Max. 400 bar / 150 °C